




## Tri Tone Discharge

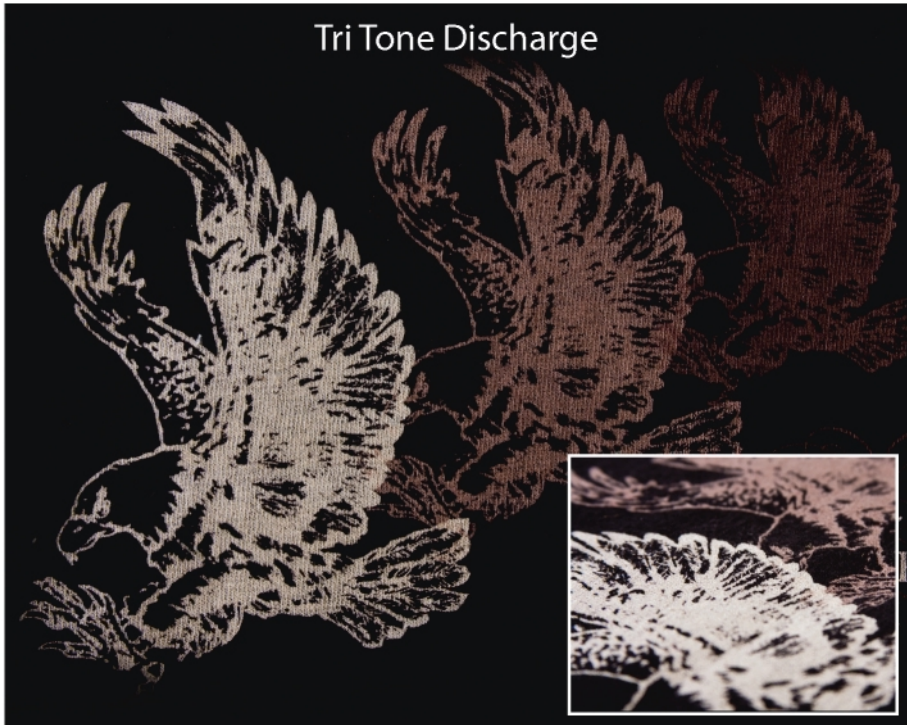

# Tri Tone Discharge Print Instructions

1.



**Ink :** WB0255 Discharge Base mixed with .75% WB0259 Discharge Agent.

**Mesh :** 156 in / 64 cm (Use water resistant emulsion)

**Squeegee :** 60/90/60

2.



**Ink :** WB0255 Discharge Base mixed with 1.25% WB0259 Discharge Agent.

**Mesh :** 156 in / 64 cm (Use water resistant emulsion)

**Squeegee :** 60/90/60

3.



WSB-99  
PVC FREE

**Ink :** WB0255 Discharge Base mixed with 6% WB0259 Discharge Agent.

**Mesh :** 156 in / 64 cm (Use water resistant emulsion)

**Squeegee :** 60/90/60

Add 5% WB0257 Penetrant and 5% WB0258 Lubricant to all inks.  
Cure at 320 degrees F / 160 C.